



## Two Note Electronic Bus Chime

### Features

- One and/or two note operation
- Built in volume control
- 12V- 24VDC operation
- Drop in replacement for Faraday 9739 series



### Description

Tecumseh Signals stop request chimes are built to meet the needs of the transportation industry. They are commonly used to differentiate between regular and handicap stop requests. They will operate on 12VDC or 24VDC vehicles.

### Ordering Information

Model	# of Wires	First Tone	Second Tone	Tone Lock Out	Delay	Operating Voltage	Grill Color
<b>ES9739</b>	3	Ding	Dong-Ding	1st and 2nd Tone	No	12-24VDC	Black
<b>ES9739A</b>	3	Ding	Ding-Dong	1st and 2nd Tone	Yes	12-24VDC	Black
<b>ES9739B</b>	3	Ding	Ding-Dong	1st and 2nd Tone	No	12-24VDC	Black
<b>ES9739BW</b>	3	Ding	Ding-Dong	1st and 2nd Tone	No	12-24VDC	White
<b>ES9739B1</b>	3	Ding	Ding-Dong	1st and 2nd Tone	No	12-24VDC	Black
<b>ES9739C</b>	3	Ding	Ding-Dong	No Lockout	No	12-24VDC	Black

Please contact factory for any special design considerations

## Specifications

### Tone Lockout

Time from power applied to tone

Units with built in delay : 0.2 sec.


All other units : 0.05 sec.

Tested to operate from 9.6 to 26.4 VDC

95dBA at 1/2 meter @12VDC at max volume setting

75dBA at 1/2 meter @12VDC at min volume setting

## Dimensions

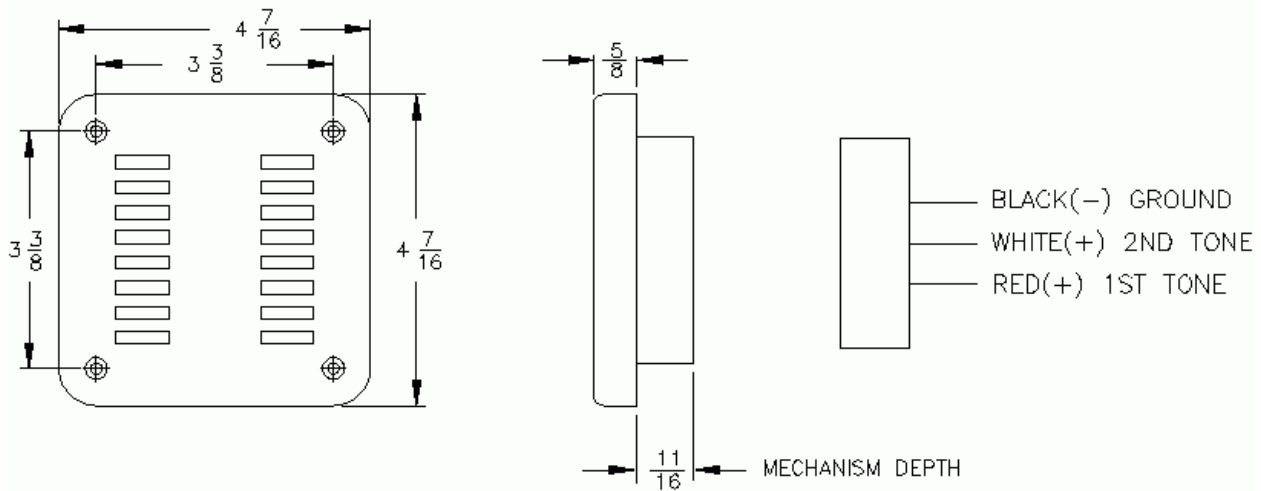

Tecumseh Signals, LLC  
805 S. Maumee St.  
Tecumseh, MI 49286  
Tel: 517-301-2064 Fax: 517-301-2068  
Web: [www.TecumsehSignals.com](http://www.TecumsehSignals.com)

Warning- The information contained in this document is intended only as a summary and is subject to change without notice. The devices described in this document have specific instruction sheets which cover various technical, limitations and liability information. Copies of these instruction sheets are provided with the product and are available from the Manufacturer. Information contained in these documents should be consulted before specifying or using the product. For further information or assistance concerning particular problems contact Manufacturer.