



One and Two Note Electronic Chimes

Features

- One and/or two note operation
- High and low volume selection
- 12V- 24VDC operation
- Surface mounting
- Drop in electronic replacement for Faraday 12 VDC and 24 VDC 1531 and 9650 series of chimes



Description

Tecumseh Signals LLC electronic chimes are built to meet the needs of the transportation industry. These units are for surface mounting and have an internal terminal strip for wiring connections. They are commonly used to indicate stop requests. The chime will operate on either 12V or 24V vehicles .

Ordering Information

Model	# of Terminals	First Tone Frequency	Second Tone Frequency	Second Tone Priority	Operating Voltage	Color
ES1531	3*	Low	-	-	12-24VDC	Pebble
ES1532	3	Low	High	No	12-24VDC	Pebble
ES1532A	3	Low	Low-High	Yes	12-24VDC	Pebble
ES1532B	3	Low	High-Low	Yes	12-24VDC	Pebble


* Only 2 of the terminals are used

Please contact factory for any special design considerations

Specifications

Tone Priority (1532x only): Second tone takes priority over first tone
Hi/low volume selection only accessible with cover taken off
Tested to operate from 9.6 to 26.4 VDC
75 dBA nominal at 1/2 meter @12VDC at high volume selection
70 dBA nominal at 1/2 meter @12VDC at low volume selection
Polycarbonate case

Dimensions and Connections

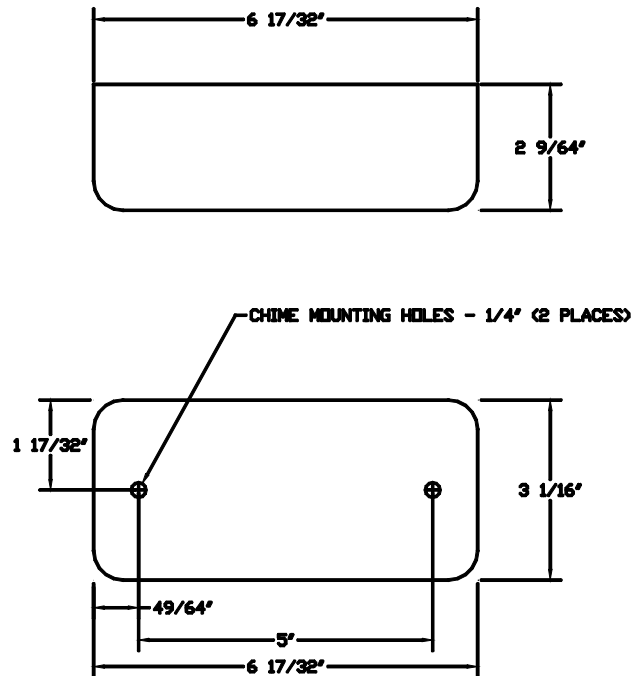

Tecumseh Signals, LLC
805 S. Maumee St.
Tecumseh, MI 49286
Tel: 517-301-2064 Fax: 517-301-2068
Web: www.TecumsehSignals.com

Warning- The information contained in this document is intended only as a summary and is subject to change with out notice. The devices described in this document have specific instruction sheets which cover various technical, limitations and liability information. Copies of these instruction sheets are provided with the product and are available from the Manufacturer. Information contained in these documents should be consulted before specifying or using the product. For further information or assistance concerning particular problems contact Manufacturer.